



# Dell Inspiron 9300 Trackpad Replacement

This repair guide includes step by step instruction for replacing your Dell 9300 trackpad

Written By: Steven Faulkner





## TOOLS:


- [Heavy-Duty Spudger](#) (1)
  - [64 Bit Driver Kit](#) (1)
-

## Step 1 — Trackpad



- Remove the battery in to order avoid damaging internal components.

## Step 2

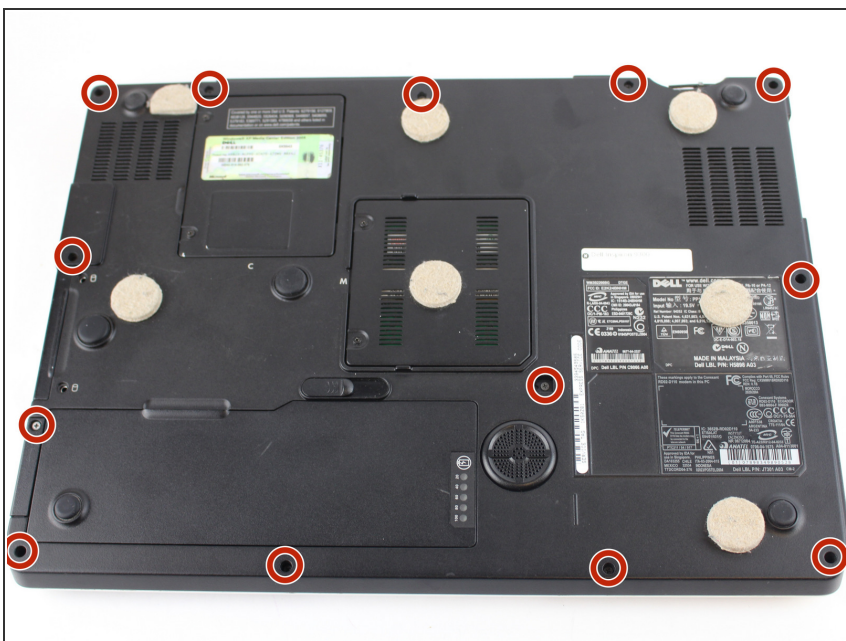

- Remove the twelve 6mm Phillips case screws from the bottom of the case.



## Step 3



- Gently pry away the silver bezel above the keyboard and below the display using a spudger.
- ❗ Start on the right hand side, where there is a notch in the bezel for easiest removal.

## Step 4



- Remove the two 5mm Phillips screws retaining the keyboard.
- Pull the keyboard up and toward the monitor to reveal the ribbon cable beneath.
- Firmly grasp the blue tape attached to the keyboard ribbon cable connector and pull upward away from the motherboard


## Step 5



- Firmly grasp the blue tape attached to the LCD display ribbon cable connector and pull upward away from the motherboard.
  - Remove the two 5mm Phillips screws holding the display hinge on both sides of the laptop.
- ⚠ Support the display as you loosen the hinges, to avoid the screen falling and breaking.





## Step 6

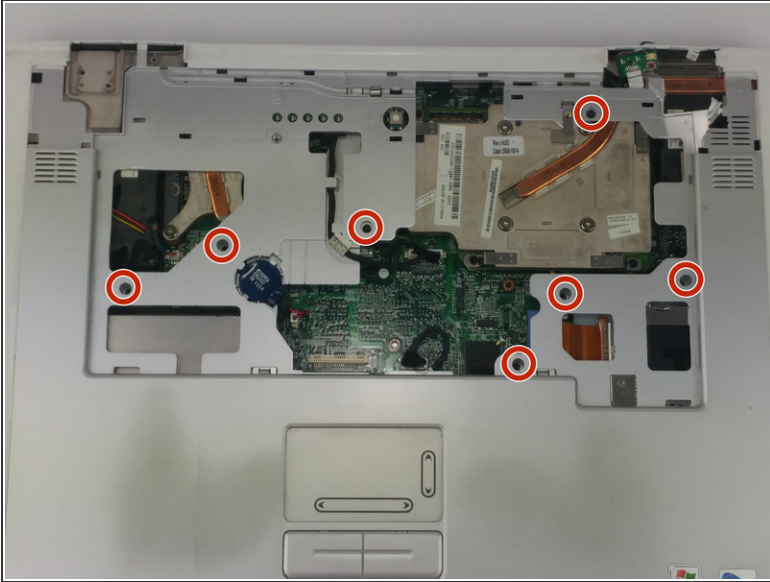

- Remove the seven 6mm Phillips screws holding the trackpad/palm rest to the motherboard.
- Gently pry the CMOS battery out of its retaining clip using a spudger

## Step 7

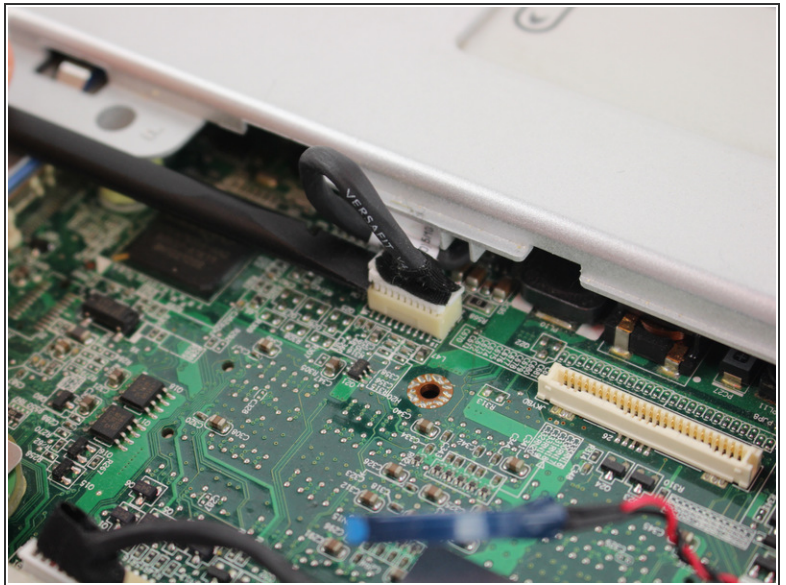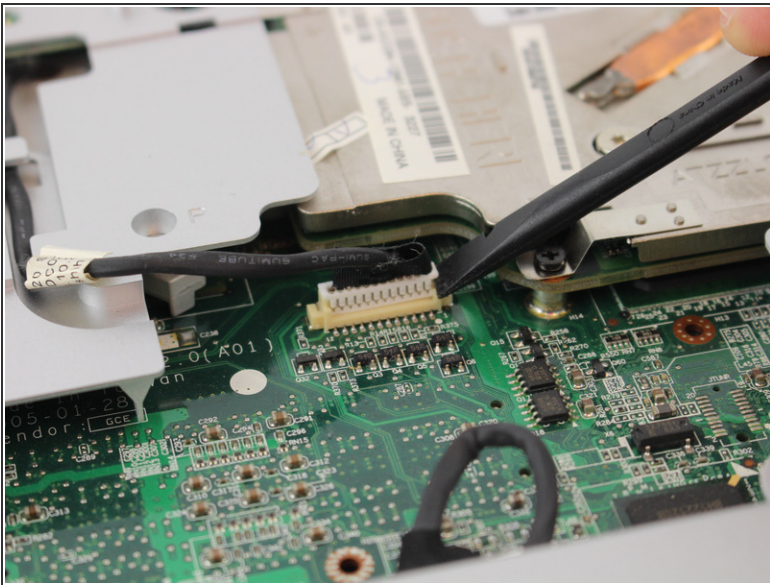

- Remove the low profile connector for the keyboard status lights located next to the video card heat sink using a spudger
- Remove the trackpad ribbon cable from the motherboard using a spudger

## Step 8



- Pull up and away on the uppercase to remove.

---

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-11-08 09:38:56 AM.